



Rec'd PCT/PTO 15 MAR 2005
PC 2003 / 003626



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

18 SEP 2003

WIPO PCT

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

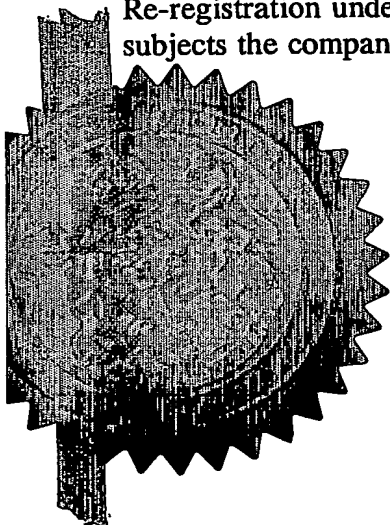

Signed


Stephen Hordley

Dated

4 September 2003

BEST AVAILABLE COPY

Patents Form 1/77

Patents Act 1977
(Rule 16)16SEP02 E700549-1 010101
P01/7700 0000-0221430.2

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

60004

2. Patent application number

(The Patent Office will fill in this part)

16 SEP 2002

0221430.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)

INEOS Silicas Limited
Bank Quay
Warrington
Cheshire WA5 1AB

08465379001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

POWDER COATING COMPOSITIONS

5. Name of your agent (if you have one)

John Derek JACKSON

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

INEOS Silicas Limited
Bank Quay
Warrington
Cheshire WA5 1AB
United KingdomWayd Wise McNeight & Law
Recent House,
Heaton Lane,
Stockport,
Cheshire SK4 1BS

Patents ADP number (if you know it)

06071116007

0845 827 5001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

14

Claim(s)

2

Abstract

1

RM

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

John Jackson

Date 16/09/2002

12. Name and daytime telephone number of person to contact in the United Kingdom

John Derek JACKSON

01925 416120

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

60004

1


POWDER COATING COMPOSITIONS

This invention relates to powder coating compositions and in particular to compositions comprising an organic resin and a zeolite.

- 5 Powder coating compositions are well known. They comprise powder compositions suitable for forming a coating on a substrate to which they are applied in the form of a powder and the coating is formed on the substrate by heating and fusing the applied powder. They contain essentially no solvent and, hence, there are virtually no emissions during application or curing. The cured film is relatively thin and it therefore necessary to
- 10 include a relatively high level of pigmentation to achieve satisfactory opacity. The most common pigment used in powder coating compositions is titanium dioxide, but this is expensive. In view of the high level of pigmentation, it is necessary to use pigments with a low oil absorption, in order to minimise any deleterious effects on the properties of the cured film. Hence, it is difficult to reduce the cost of the coating composition by adding
- 15 materials such as calcium carbonate etc. to extend the titanium dioxide, since such materials generally have a high oil absorption. Materials which have been used to extend titanium dioxide in powder coatings are lithopone and barium sulphate but these are relatively ineffective extenders.
- 20 One object of this invention is to provide a powder coating composition which produces a finished coating with desirable properties and is less expensive than compositions based on non-extended titanium dioxide.

- 25 According to the invention, a powder coating composition comprises a mixture, in particulate form, of a zeolite and an organic resin, said zeolite containing less than 9 per cent water by weight as determined by heating at 800° C for 1 hour

In general, the empirical formula of a zeolite is



- 30 wherein M represents a metallic cation having a valency of n, x indicates the ratio of atoms of silicon to atoms of aluminium and y indicates the ratio of molecules of water to atoms of aluminium. Many different types of zeolite, with varying ratios of silica to alumina, are known. Commonly, however, M is an alkali metal and a preferred alkali metal is sodium, for economic reasons.

- 35 The zeolites used in this invention may have the structure of any of the known zeolites. The structure and characteristics of many zeolites are described in the standard work "Zeolite Molecular Sieves" by Donald W. Breck, published by Robert E. Krieger Publishing

80004

2

Company. Usually, the value of x in the above empirical formula is in the range 1.5 to 10. The value of y , which represents the amount of water contained in the voids of the zeolite, can vary widely. In anhydrous material $y = 0$ and, in fully hydrated zeolites, y may be up to 5. However, for zeolites which are useful in the current invention, the value of y is such that the water content of the zeolite is less than 9 per cent by weight, as determined by heating at 800° C for 1 hour.

Zeolites useful in this invention may be based on naturally-occurring or synthetic aluminosilicates and the preferred forms of zeolite have the structure known as zeolite P or zeolite A. Particularly preferred forms of zeolite are those disclosed in EP-A-0 384 070, EP-A-0 585 364, EP-A-0 897 010, EP-A-0 742 780, WO-A-96/14270, WO-A-96/34828 and WO-A- 97/08102, the entire contents of which are incorporated herein by this reference. The zeolite P described in EP-A-0 384 070 has the empirical formula given above in which M represents an alkali metal and x has a value up to 2.66, preferably in the range 1.8 to 2.66, and which is particularly useful in the present invention.

The amount of water, determined by heating at 800° C for 1 hour, ("total water") present in the zeolite used in the invention is below 9 per cent by weight, but is preferably less than 8.5 per cent by weight. More preferably, the total water in the zeolite is less than 7 per cent by weight.

The water present in the zeolite can produce undesirable effects if it is released during fusion of the coating. An estimate of water which may be released during fusion of the coating can be obtained by heating the zeolite at 105° C for 4 hours. The water loss under these conditions ("moisture content") should preferably be below 2 per cent by weight. More preferably, the moisture content of the zeolite is below 1 per cent by weight.

The zeolite preferably has a weight mean particle size as determined by Malvern Mastersizer™ in the range 0.5 μm to 5.0 μm . Preferably, the weight mean particle size is in the range 1.0 μm to 4.0 μm .

The organic resin which is present in the powder coating composition can be any organic resin which is suitable for preparing powder coatings. It may be a thermoplastic resin or a thermosetting resin.

Suitable thermoplastic resins include plasticised poly(vinyl chloride), polyamides, polyolefins and poly(vinylidene fluoride). Preferably, the plasticised poly(vinyl chloride) is a homopolymer of vinyl chloride. Preferred polyamides are nylon-11 and nylon-12.

60004

3

Polyethylene and polypropylene, which may be modified by grafting of carboxylic acid or anhydride groups onto the polymer backbone, are suitable polyolefins.

Many thermosetting resins have been used in powder coatings and may be used in the compositions of this invention. Suitable resins include epoxy resins, polyester resins, hybrid epoxy-polyester resins, urethane resins and acrylic resins.

Epoxy resins are characterised by the presence of an epoxide group and the most commonly used resins are diglycidyl ethers of bisphenol A, derived from bisphenol A and epichlorohydrin. Such resins are cured after application to a substrate by means of a curing agent, such as a polyamine or a polyamide, and such a curing agent is present in the composition of the invention when epoxy resins are used.

Many polyesters are suitable for use in this invention and are well known in the art of powder coatings. The polyesters are usually prepared from polybasic acids or their esterifiable derivatives and from polyols. Carboxyl-rich and hydroxyl-rich polymers are suitable. Typical polyesters include esters of terephthalic acid, isophthalic acid, trimellitic acid, adipic acid or sebacic acid with ethylene glycol, 1,2-propylene glycol, trimethylol propane, a butanediol, glycerol or tris(hydroxyethyl)isocyanurate. Normally, polyesters are cured after application and preferred curing agents are triglycidyl isocyanurate (TGIC) and hydroxyalkyl amides, such as those sold under the Trademark PRIMID.

The urethane polymers which are used in powder coating compositions are often urethane polyesters. These are typically prepared by reaction of a polyester with a caprolactam-blocked polyisocyanate; this reaction occurring after application of the powder to the substrate. Hence, for these systems, the organic resin consists of a mixture of polyester resin and blocked polyisocyanate. Suitable polyesters are, for example, polyesters of terephthalic acid, isophthalic acid or trimellitic acid with neopentyl glycol. Commonly, these are cured using adducts of isophorone diisocyanate and low molecular weight polyols, such as polyethylene glycols or polypropylene glycols, the adducts being blocked with caprolactam. Other suitable curing agents include caprolactam-blocked toluene diisocyanate.

When powder coating compositions according to the invention additionally contain pigmentary titanium dioxide, the zeolite acts as an extender for the titanium dioxide. A preferred powder coating according to the invention comprises a mixture, in particulate form, of a zeolite, an organic resin and pigmentary titanium dioxide, said zeolite

80004

4

containing less than 9 per cent water by weight determined by heating at 800° C for 1 hour.

When the finished (cured) coating is white, the powder coating according to the invention usually contains from 10 to 40 per cent by weight pigmentary titanium dioxide. Preferably, the amount of titanium dioxide present is from 20 to 30 per cent by weight of the coating.

Powder coatings which produce a coloured finished coating often contain pigmentary titanium dioxide in addition to at least one coloured pigment. In such systems, the amount of pigmentary titanium dioxide is frequently in the range 2 to 20 weight per cent of the composition and commonly in the range 5 to 15 weight per cent of the composition.

The amount of zeolite in white or coloured compositions is usually up to 50 per cent of the combined weight of zeolite and pigmentary titanium dioxide. Preferably, the amount of zeolite is up to 30 per cent of the combined weight of zeolite and pigmentary titanium dioxide in the composition. For optimum properties (i.e. good opacity at an economical cost) the amount of zeolite is usually from 10 to 25 per cent of the combined weight of zeolite and titanium dioxide.

Thus, a typical white powder coating according to the invention comprises up to 20 weight per cent zeolite and, more commonly, from 1 to 10 weight per cent zeolite. A typical coloured powder coating composition comprises up to 10 weight per cent of zeolite and, more commonly, from 0.5 to 8 per cent by weight zeolite.

In addition to the zeolite and titanium dioxide, coloured powder coating compositions according to the invention also comprise at least one coloured pigment. Suitable pigments may be organic or inorganic pigments, as conventionally used in powder coating compositions. In view of the fact that the powder coatings are heated after application, suitable pigments usually need to be stable up to a temperature of at least 150° C and preferably up to 250° C. Iron oxides and heat-stable organic pigments have been successfully used.

The powder coating compositions of the invention frequently contain additional components often used in such compositions, such as catalysts and curing accelerators, flow control additives, UV stabilisers, antifoams and matting agents.

It is generally necessary to mix intimately the ingredients of the powder coating compositions of the invention in order to achieve a satisfactorily homogeneous finished

60004

5

coating. Commonly used methods of producing an intimate mixture include melt-mixing and dry blending.

In the melt-mixing process, dry ingredients (zeolite, organic resin and any other components) are weighed into a batch mixer such as a high intensity impeller mixer, a medium intensity plough mixer or a tumble mixer. Mixing times depend upon the equipment used. For high intensity mixers, the mixing time is usually in the range 1 to 5 minutes and the mixing time in a tumble mixer is frequently in the range 30 to 60 minutes. The premix thus formed is then compounded together with any liquid ingredients in a high shear extruder such as a single screw extruder (e.g. Buss Ko-kneader) or a twin screw extruder. It is important to ensure that the combination of temperature of the mixture and residence time for thermosetting compositions is such that little or no curing takes place in the extruder, although the temperature is usually slightly above the melting point of the organic resin. The appropriate processing temperature is chosen to suit the resin present in the composition, but is usually in the range 80 to 140° C. Residence time in the extruder is usually in the range 0.5 to 2 minutes. The extruded material is usually cooled rapidly by water cooling and broken into pellets or chips with a size of about 5 to 10 mm. These pellets or chips are then ground to an appropriate particle size using conventional techniques. Frequently, thermoplastic resins need to be ground using cryogenic techniques.

The powder coating compositions can also be prepared by dry blending and this technique is particularly suitable where the organic resin is plasticised poly(vinyl chloride). All the ingredients are agitated in a high speed mixer at an elevated temperature in order to achieve intimate mixing.

The average particle size of the powder coating compositions prepared by grinding the melt-mixed material or by dry blending depends to some extent on the method by which the powder is to be applied and the thickness of the coating to be applied. When the powder is to be applied by electrostatic spraying the average particle size is usually in the range 10 to 75 µm. For fluidised bed coating and thicker coatings, the particle size of the powder coating compositions is generally in the range 40 to 200 µm.

The powder coating compositions according to the invention are suitable for coating on a substrate using any method normally used for coating substrates with powder coatings. The precise nature of the organic resin will often determine the optimum conditions for application.

80004

6

The powder coating composition can be applied to a substrate using a fluid bed in which the particles of powder coating composition are fluidised and the substrate is introduced into the fluidised bed. An electrostatic fluidised bed process using ionised air can also be used. The substrate is earthed and, consequently, the charged powder is attracted to the substrate.

Very commonly, powder coating compositions are applied by electrostatic spray coating. Typically, the powder coating composition is stored in a fluidised-bed reservoir and passed into an air stream where it is charged by passing through, for example, a corona discharge field.

The finished coating is formed by fusing the powder. For thermoplastic resins the applied powder coating composition must be heated to a temperature above the melting point of the resin so that the particles melt and fuse together. For thermosetting resins, the coating is heated to a temperature at which the resin or its precursors are cured into a coating which flows sufficiently to produce a uniform coating on the substrate. The appropriate temperature depends principally upon the actual resin or resins used and is readily determined by a person skilled in the art of powder coatings.

The following tests have been used to measure the parameters which characterise this invention.

Total Water Content

An accurately weighed sample of zeolite (approximately 2.5 g) is placed in a silica crucible and heated in a muffle furnace at 800° C for 1 hour. The sample is cooled to room temperature in a sealed desiccator. The loss in weight is measured and expressed as a percentage of the original weight.

Moisture Content

An accurately weighed sample of zeolite (approximately 3 g) was placed in a weighing dish and heated in an oven at 105° C for 4 hours. The sample was cooled to room temperature in a sealed desiccator. The loss in weight was measured and expressed as a percentage of the original weight.

Weight Mean Particle Size

The weight mean particle size is determined using a Malvern Mastersizer™ model X, with a lens range up to 300 mm RF and MS17 sample presentation unit. This instrument, made by Malvern Instruments, Malvern, Worcestershire, uses the principle of Mie

60004

7

- scattering, utilising a low power He/Ne laser. Before measurement the sample is dispersed ultrasonically in water for 7 minutes to form an aqueous suspension. This suspension is stirred before it is subjected to the measurement procedure outlined in the instruction manual for the instrument, utilising the 300 nm RF lens range in the detector system. The Malvern Mastersizer™ measures the weight particle size distribution of the inorganic material or reference material. The weight mean particle size (d_{50}) or 50 percentile is readily obtained from the data generated by the instrument.

Oil Absorption

- The oil absorption is determined by the ASTM spatula rub-out method (American Society of Test Material Standards D 281). The test is based on the principle of mixing linseed oil with the zeolite by rubbing with a spatula on a smooth surface until a stiff putty-like paste is formed which will not break or separate when it is cut with a spatula. The oil absorption is then calculated from the volume of oil ($V \text{ cm}^3$) used to achieve this condition and the weight, W , in grams, of zeolite by means of the equation:

$$\text{Oil absorption} = (V \times 100)/W, \text{ i.e. expressed in terms of } \text{cm}^3 \text{ oil}/100 \text{ g zeolite.}$$

60° Gloss

- The gloss (60°) values of the cured coatings were measured using a Sheen Tri-mirogloss 20-60-85 (160) unit. Gloss is a measurement of the intensity of a reflected incident beam, where the incident beam is projected at 60° to the perpendicular of the coating plane as described in ASTM D 523.

Colour

- Colour was determined using an X-rite 938 Spectrodensitometer. This unit measures the L^* , a^* , b^* tristimulus values as described using the CIE 1978 L^* , a^* , b^* (CIELAB) Colour Space where the L^* axis describes lightness, a^* describes the axis from redness (positive a^* values) to greenness (negative a^* values) and b^* describes the axis from yellowness (positive b^* values) to blueness (negative b^* values).

Contrast Ratio

- The contrast ratio is measured using an X-rite 938 Spectrodensitometer. The contrast ratio is the extent to which a coating hides or obscures the contrasting features of a test substrate. In this instance, contrast ratio is expressed photometrically as the ratio of the luminous (CIE-Y) reflection of the coating measured over a black substrate and the luminous (CIE-Y) reflection of the same coating measured over a white substrate.

60004

8

Impact

The impact resistance of coatings was conducted using ASTM D2794, with indentation to 2.5mm at 223 cm/kg (40 lb/ft).

5 Cupping Test

This test was carried out using an Erichsen Cupping tester as described in BS 3900 E4 which forces a spherical steel ball into the uncoated side of a metallic substrate until the depth of the cup is no more than 18mm. The depth of indentation at which the coating was visually observed to crack or split is recorded.

10

UV Stability

UV stability was determined through exposure of cured powder coating samples to emissions from a Xenon lamp with daylight filter for given periods (1000 or 2000 hrs continuous). Equipment used was Q-Sun 1000 Xenon Lamp unit with daylight filter under conditions of irradiance at 0.8 W/m² at 420 nm and temperature of 50° C.

15

The invention is illustrated by the following non-limiting examples.

20 **EXAMPLES**Example 1

A variety of epoxy-polyester powder coating compositions was prepared according to the formulations given in Table 1 below. Sample A was a standard composition containing titanium dioxide and Samples B to D were similar but various proportions of the titanium dioxide had been substituted by a Zeocros™ E110, a zeolite sold by INEOS Silicas Limited, Warrington, England. This is a zeolite MAP (maximum aluminium P-type) with an average particle size of 2 µm by Malvern Mastersizer™, a Total Water Content of 8.0 per cent by weight and an oil absorption of 50 cm³/100 g.

30

60004

9

TABLE 1

| | Sample A | Sample B | Sample C | Sample C |
|---|----------|----------|----------|----------|
| Epoxy resin (Vantico 8064) ¹ | 32.5 | 32.5 | 32.5 | 32.5 |
| 50/50 Polyester/epoxy resin (Reafree 6877) ² | 32.5 | 32.5 | 32.5 | 32.5 |
| Flow aid (Resiflow PV88) ³ | 0.8 | 0.8 | 0.8 | 0.8 |
| Benzoin | 0.4 | 0.4 | 0.4 | 0.4 |
| Barytes (Alwhite AW10) ⁴ | 3.8 | 3.8 | 3.8 | 3.8 |
| Titanium dioxide (Kronos 2310) ⁵ | 30.0 | 27.0 | 22.5 | 15.0 |
| Zeolite (Zeocros E110) | - | 3.0 | 7.6 | 15.0 |

¹Available from Vantico Ltd, Ickleton Road, Duxford, Cambridge, UK.

²Available from Cray Valley Products, Waterloo Works, Machen, UK.

³Available from Worlee-Chemie GmbH, VB Hamburg, Siegfried Handt, Grusonstr. 22,

5 Hamburg, Germany

⁴Available from Viaton Industries Ltd., Brassington, Carsington, UK.

⁵Available from Kronos Europe SA/NV, Rue de l'Hopital, Brussels, Belgium.

The amounts in Table 1 are proportions by weight.

10

The powder coating compositions were prepared as follows. The resins and pigments were dry blended in a 5 litre tumble mixer for 5 minutes. The dry blend was then fed through a hopper and processed through a Prism 18 mm twin screw extruder at 110/60° C (screw speed 270 rpm at 70% torque). The extrudates were then ground in a

15

Fritsch P14 mill at 18,000 rpm and sieved through a 125 µm sieve to give a powder having an average particle size of approximately 50 µm.

20

The powder coating compositions were then applied to clean 15 X 10 cm aluminium Q-panels by Mitsuba corona discharge gun using 60 kV charge so that the final (post-cure) film thickness was from 60 to 70 µm.

The applied coatings were heated at 180° C for 10 minutes to cure. The cured coatings were assessed for Gloss, Colour, Contrast Ratio, Impact, and in a Cupping Test and the results are reported in Table 2 below.

25

60004

10

TABLE 2

| | Sample A | Sample B | Sample C | Sample D |
|---------------------------|----------|----------|----------|----------|
| Gloss | 94 | 91 | 90 | 90 |
| Colour δL^* | std | -0.27 | -0.88 | -1.67 |
| δa^* | std | +0.05 | +0.06 | -0.01 |
| δb^* | std | -0.20 | -0.60 | -0.60 |
| δE | std | +0.34 | +1.07 | +1.85 |
| Contrast Ratio 50 μm | 97% | 97% | 96% | 93% |
| 90 μm | 99% | 99% | 98% | 98% |
| Impact (Category) | 1 | 1 | 1 | 1 |
| Cupping Test | 7 mm | 7 mm | 7 mm | 7 mm |

- 5 The samples were also exposed to UV radiation (see UV Stability test) and the effect of UV exposure on gloss measured. Results are shown in Table 3 below.

TABLE 3

| Exposure (hrs) | | 0 | 50 | 100 | 280 | 420 | 1000 |
|----------------|---|----|----|-----|-----|-----|------|
| Gloss | A | 94 | 93 | 87 | 61 | 46 | 18 |
| | B | 91 | 91 | 83 | 62 | 45 | 18 |
| | C | 90 | 89 | 84 | 57 | 41 | 14 |
| | D | 90 | 89 | 81 | 51 | 34 | 9 |

10

Example 2

A variety of white polyester-Primid powder coating compositions was prepared according to the formulations given in Table 4 below. Sample E was a standard composition containing titanium dioxide and Samples F to H were similar but various proportions of the titanium dioxide had been substituted by Zeocros™ E110, as used in Example 1.

15

60004

11

TABLE 4

| | Sample E | Sample F | Sample G | Sample H |
|---|----------|----------|----------|----------|
| Polyester resin (UCB V7630) ⁶ | 60 | 60 | 60 | 60 |
| bis-N,N-dihydroxyethyladipamide (Primid XL-552) ⁷ | 3.2 | 3.2 | 3.2 | 3.2 |
| Flow aid (Resiflow PV88) | 0.8 | 0.8 | 0.8 | 0.8 |
| Benzoin | 0.2 | 0.2 | 0.2 | 0.2 |
| Barytes (Alnwhite AW10) | 5.8 | 5.8 | 5.8 | 5.8 |
| Titanium dioxide (Kronos 2310) | 30.0 | 27.0 | 22.5 | 15.0 |
| Zeolite (Zepcros E110) | - | 3.0 | 7.5 | 15.0 |

⁶Available from UCB (Chem) Ltd., UCB House, 3 George St., Watford, UK

⁷Available from EMS Chemie, Kugelstrasse 22, Mannedorf, Switzerland.

- 5 The amounts in Table 4 are proportions by weight.

10 The powder coating compositions were prepared as follows. The resins and pigments were dry blended in a 5 litre tumble mixer for 5 minutes. The dry blend was then fed through a hopper and processed through a Prism 16 mm twin screw extruder at 110/60° C (screw speed 270 rpm at 70% torque). The extrudates were then ground in a Fritsch P14 mill at 18,000 rpm and sieved through a 125 µm sieve to give a powder having an average particle size of approximately 50 µm.

15 The powder coating compositions were then applied to clean 15 X 10 cm aluminium Q-panels by Mitsuba corona discharge gun using 60 kV charge so that the final (post-cure) film thickness was from 60 to 70 µm.

20 The applied coatings were heated at 180° C for 10 minutes to cure. The coatings were assessed for Gloss, Colour, Contrast Ratio, Impact, and in a Cupping Test and the results are reported in Table 5 below.

60004

12

TABLE 5

| | Sample E | Sample F | Sample G | Sample H |
|---------------------------|----------|----------|----------|----------|
| Gloss | 82 | 86 | 88 | 88 |
| Colour δL^* | std | -0.23 | -0.27 | -0.53 |
| δa^* | std | +0.02 | +0.05 | +0.08 |
| δb^* | std | -0.29 | -0.32 | -0.09 |
| δE | std | +0.37 | +0.42 | +0.54 |
| Contrast Ratio 50 μm | 98% | 98% | 98% | 96% |
| 90 μm | 100% | 99% | 98% | 98% |
| Impact (Category) | 3 | 1 | 1 | 1 |
| Cupping Test | 7 mm | 7 mm | 7 mm | 7 mm |

The samples were also exposed to UV radiation (see UV Stability test) and the effect of UV exposure on gloss measured. Results are shown in Table 6 below.

5

TABLE 6

| Exposure (hrs) | | 0 | 54 | 100 | 189 | 267 | 523 | 1000 | 1504 | 2000 |
|----------------|---|----|----|-----|-----|-----|-----|------|------|------|
| Gloss | E | 82 | 84 | 84 | 83 | 84 | 83 | 83 | 82 | 82 |
| | F | 85 | 85 | 85 | 85 | 86 | 84 | 83 | 82 | 81 |
| | G | 88 | 88 | 88 | 87 | 86 | 87 | 87 | 81 | 83 |
| | H | 86 | 87 | 87 | 86 | 86 | 86 | 86 | 84 | 84 |

10 Example 3

A variety of coloured polyester-Primal powder coating compositions was prepared according to the formulations given in Table 7 below. Samples I and K were standard coloured compositions and Samples J to L were similar but in each case 25% of the titanium dioxide had been substituted by Zecros™ E110, as used in Example 1.

15

60004

13

TABLE 7

| | Sample I | Sample J | Sample K | Sample L |
|---|----------|----------|----------|----------|
| Polyester resin (UCB V7630) | 60 | 60 | 60 | 60 |
| bis-N,N-dihydroxyethyladipamide (Primid XL-552) | 3.2 | 3.2 | 3.2 | 3.2 |
| Flow aid (Resiflow PV88) | 0.8 | 0.8 | 0.8 | 0.8 |
| Benzoin | 0.2 | 0.2 | 0.2 | 0.2 |
| Barytes (Alwhite AW10) | 5.8 | 5.8 | 5.8 | 5.8 |
| Titanium dioxide (Kronos 2310) | 10.0 | 7.5 | 10.0 | 7.5 |
| Zeolite (Zeocros E110) | - | 2.5 | - | 2.5 |
| Blue pigment (Blue BGP) ^a | 3.0 | 3.0 | - | - |
| Yellow pigment (Bayferrox Oxide YW3910) ^a | - | - | 3.0 | 3.0 |

^aAvailable from Albion Chemicals Group, Rawdon House, Green Lane, Yeadon, Leeds, UK.

^aAvailable from Bayer plc, Bayer House Strawberry, Newbury, UK.

5

The amounts in Table 7 are proportions by weight

The powder coating compositions were prepared as follows. The resins and pigments were dry blended in a 5 litre tumble mixer for 5 minutes. The dry blend was then fed through a hopper and processed through a Prism 16 mm twin screw extruder at 110/60° C (screw speed 270 rpm at 70% torque). The extrudates were then ground in a Fritsch P14 mill at 18,000 rpm and sieved through a 125 µm sieve to give a powder having an average particle size of approximately 50 µm.

The powder coating compositions were then applied to clean 15 X 10 cm aluminium Q-panels by Mitsuba corona discharge gun using 60 kV charge so that the final (post-cure) film thickness was from 60 to 70 µm.

The applied coatings were heated at 180° C for 10 minutes to cure. The coatings were assessed for Gloss, Colour, Contrast Ratio, Impact, and in a Cupping Test and the results are reported in Table 8 below.

60004

14

TABLE 8

| | Sample I | Sample J | Sample K | Sample L |
|---------------------------|----------|----------|----------|----------|
| Gloss | 83 | 81 | 84 | 82 |
| Colour δL^* | std | -2.13 | std | -1.98 |
| δa^* | std | +2.26 | std | +0.43 |
| δb^* | std | +0.87 | std | +1.29 |
| δE | std | +3.23 | std | +2.40 |
| Contrast Ratio 50 μm | 100% | 100% | 97% | 97% |
| 90 μm | 100% | 100% | 98% | 98% |
| Impact (Category) | 2 | 2 | 2 | 1 |
| Cupping Test | 7 mm | 7 mm | 7 mm | 7 mm |

The samples were also exposed to UV radiation (see UV Stability test) and the effect of
 5 UV exposure on gloss measured. Results are shown in Table 9 below.

TABLE 9

| Exposure (hrs) | | 0 | 54 | 100 | 189 | 267 | 523 | 1000 | 1504 | 2000 |
|----------------|---|----|----|-----|-----|-----|-----|------|------|------|
| Gloss | I | 83 | 83 | 84 | 85 | 84 | 83 | 85 | 85 | 82 |
| | J | 81 | 82 | 80 | 83 | 83 | 84 | 82 | 81 | 80 |
| | K | 84 | 84 | 84 | 83 | 83 | 83 | 82 | 80 | 78 |
| | L | 82 | 83 | 84 | 84 | 83 | 83 | 82 | 80 | 78 |

60004

15

CLAIMS

1. A powder coating composition comprising a mixture, in particulate form, of a zeolite and an organic resin, characterised in that said zeolite contains less than 8 per cent water by weight as determined by heating at 800° C for 1 hour.
2. A powder coating composition according to claim 1 characterised in that the zeolite is a zeolite A or a zeolite P.
3. A powder coating composition according to claim 1 or 2 characterised in that the zeolite contains less than 7 per cent by weight water, as determined by heating at 800° C for 1 hour.
4. A powder coating composition according to any one of the preceding claims characterised in that the zeolite has a water loss after heating at 105° C for 4 hours of less than 2 per cent by weight.
5. A powder coating composition according to any one of the preceding claims characterised in that the zeolite has a weight mean particle size in the range 0.5 µm to 6.0 µm.
6. A powder coating composition according to any one of the preceding claims characterised in that the organic resin is a plasticised poly(vinyl chloride), a polyamide, a polyolefin, poly(vinylidene fluoride), an epoxy resin, a polyester resin, a hybrid epoxy-polyester resin, a urethane resin or an acrylic resin.
7. A powder coating composition according to any one of the preceding claims characterised in that the powder coating composition additionally comprises from 10 to 40 per cent by weight pigmentary titanium dioxide.
8. A powder coating composition according to claim 7 characterised in that the amount of zeolite present is up to 20 per cent by weight of the coating composition.
9. A powder coating composition according to any one of claims 1 to 8 characterised in that the powder coating composition additionally contains a coloured pigment and from 2 to 20 weight per cent pigmentary titanium dioxide.

60004

16

10. A powder coating composition according to claim 9 characterised in that the amount of zeolite present in the composition is from 0.5 to 8 per cent by weight of the coating composition.

11. A powder coating composition according to any one of the preceding claims characterised in that the particles of the powder coating composition have an average size in the range 10 to 75 μm .

12. A powder coating composition according to any one of the preceding claims characterised in that the particles of the powder coating composition have an average size in the range 40 to 200 μm .


13. A method of preparing a powder coating composition comprising forming an intimate mixture of an organic resin and a zeolite characterised in that the zeolite contains less than 9 per cent water by weight as determined by heating at 800° C for 1 hour.

60004

17

ABSTRACT

A powder coating composition comprises a mixture, in particulate form, of a zeolite and an organic resin, said zeolite containing less than 9 per cent water by weight as
5 determined by heating at 800° C for 1 hour. The zeolite can act as an extender for titanium dioxide in systems containing the latter.

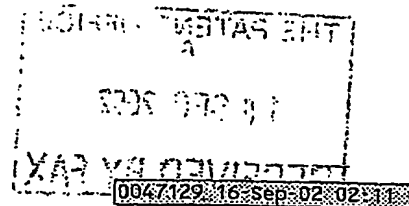

THE PATENT OFFICE
05 SEP 2003
Received in Patents
International Unit

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.